

## Development of multilayer interferometer for wide-bandwidth neutrons

M. Kitaguchi<sup>A</sup>, T. Nambu<sup>A</sup>, H. M. Shimizu<sup>A</sup>, K. Mishima<sup>A,B</sup>, G. Ichikawa<sup>B</sup>, T. Fujiie<sup>C</sup>,  
T. Hosobata<sup>D</sup>, Y. Yamagata<sup>D</sup>, Y. Seki<sup>E</sup>, and M. Hino<sup>F</sup>  
<sup>A</sup>Nagoya Univ., <sup>C</sup>KEK, <sup>B</sup>Rikkyo Univ., <sup>D</sup>RIKEN, <sup>E</sup>Tohoku Univ., <sup>F</sup>KURNS, Kyoto Univ.

Neutron interferometry is a powerful technique for studying fundamental physics. Numerous interesting experiments [1] have been performed since the first successful test of a single-crystal neutron interferometer [2]. However, the single-crystal interferometer is inherently not able to deal with a neutron that has a wavelength longer than twice its lattice constant. In order to investigate problems of fundamental physics, the interferometry with cold neutrons is extremely important, since the sensitivity of interferometer for small interaction increases with the neutron wavelength. One of the solutions is an interferometer using neutron multilayer mirrors [3]. We succeeded in developing a multilayer interferometer for cold neutrons in which two paths are completely separated for the first time using wide-gap etalons at MINE in JRR3 [4]. In the case of pulsed neutron beams, the intensity at each wavelength can be resolved with the arrival time on the detector. When the multilayer mirrors are applied to pulsed neutrons, the interference fringes at each wavelength can be observed simultaneously. The phase of interferogram depends on the wavelength of neutrons. We installed the interferometer into the beamline J-PARC MLF BL05 to demonstrate the interferometer with pulsed neutrons. Figure 1 shows the interference fringes according to time-of-flight. We also demonstrated the measurement of the neutron scattering lengths of several nuclei. The experimental values were consistent with literature ones for most samples [5].

Because the mirrors had narrow bandwidth of the neutron reflectivity, the number of neutrons contributing to the interference was limited. When the neutron supermirrors whose lattice constants vary gradually are utilized in the interferometer, the effective range of neutron wavelength can be broadened. We have made the neutron half mirrors with wide band for the

interferometer by using Ion Beam Sputtering facility in KURNS. The reflectivity must be confirmed before assembly of BSEs. We measured the reflectivity of all mirrors with neutron reflectometer at MINE in JRR3. Neutron wavelength was 0.88 nm and the bandwidth of the beam was 2.7% of the wavelength. The reflectivity was desirable, but the surface was found to be distorted by using a laser interferometer. The interferometer was tried to be assembled, but interference fringes could not be observed. It is necessary to develop a multilayer fabrication method that suppress the distortion of the surface.

- [1] H. Rauch and S. Werner, Neutron Interferometry Oxford University Press, Oxford, 2000; J. Byrne, Neutron, Nuclei and Matter Institute of Physics Publishing, London, 1994, Chap. 7; Mater Wave Interferometry, edited by G. Badurek, H. Rauch, and A. Zeilinger North-Holland, Amsterdam, 1988.
- [2] H. Rauch, W. Treimer, and U. Bonse, Phys. Lett. 47A, 369 (1974).
- [3] M. Kitaguchi, et al., Phys. Rev. A 67, 033609 (2003).
- [4] Y. Seki, et al., J. Phys. Soc. Jpn. 79, 124201 (2010).
- [5] T. Fujiie, et al., Phys. Rev. Lett. 123, 023402 (2024).

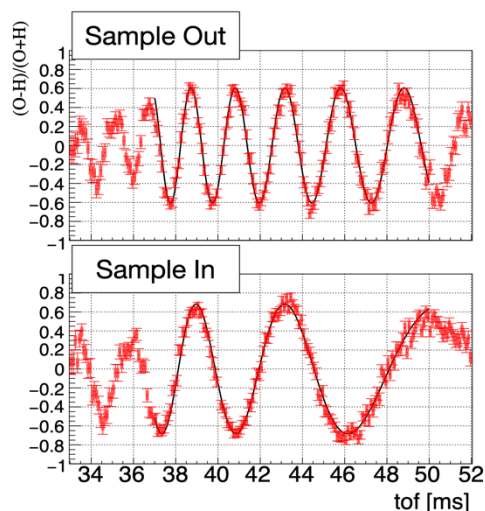


Fig. 1. Normalized interference fringes with multilayer mirrors for pulsed neutrons. The phase shift due to a sample was observed.